


BARNES[®] SEC Series

2-5 HP CUTTER PUMP


PACKAGED TO RETROFIT INTO MULTIPLE INSTALLATIONS

The Barnes SEC Cutter Pump is designed to solve clogging problems in municipal, industrial and commercial applications with light solids content.

The pump includes everything you need to install the pump into multiple installations. Each pump is equipped with a horizontal JIS80 discharge, and sold with a 3" or 4" vertical discharge elbow AND our JIS80 to 4" ANSI flange adapter.

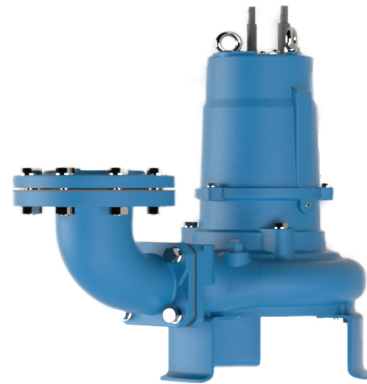

- Rugged pump design, constructed with ASTM A-48 Class 30 Cast Iron
- Removable stand and discharge accessories to fit perfectly in free-standing installations or on a variety of guide rail systems
- Air filled motor protected with integral moisture and temperature sensors
- Steel cutting plate and impeller blade provide superior cutting

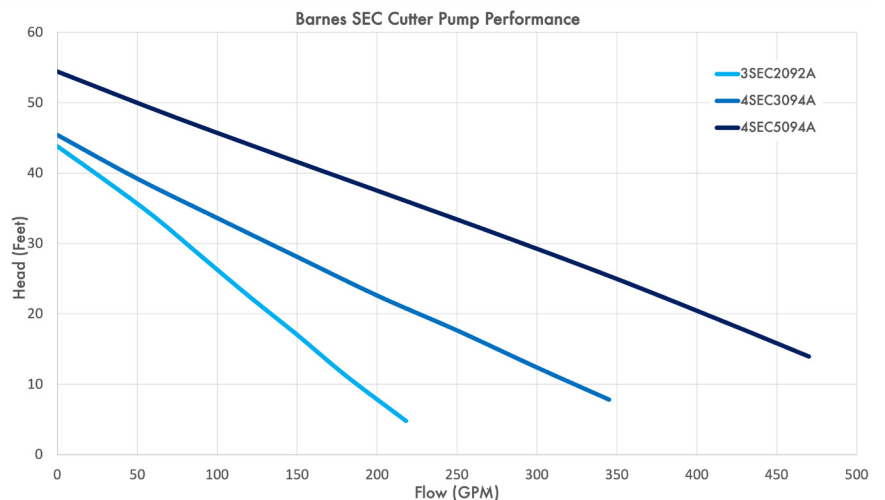

PUMPS

Part No.	Model No.	HP	RPM	Voltage	PH/HZ	Discharge Elbow
148313	3SEC2092A	2	3500	208-230	3/60	3" NPT w/ 3" 2-Bolt Flange*
148314	4SEC3094A	3	1750	208-230	3/60	4" NPT w/ 4" ANSI Class 125 Flange
148315	4SEC5094A	5	1750	208-230	3/60	4" NPT w/ 4" ANSI Class 125 Flange

* Flange adapter not included with 3SEC2092A

PACKAGE FEATURES:

By providing a single out-of-the box solution, this package will allow for simplified inventory, and no surprises during installation.



Elbow

3" NPT compatible with Barnes BAF-3030



JIS Flange

Compatible with Tsurumi guide rail system



Flange Adapter

Compatible with Barnes BAF-4x4 and Flygt and Zoeller guide rail systems

Tsurumi is a registered trademark of Tsurumi America, Inc.
 Flygt is a registered trademark of Xylem Water Solutions.
 Zoeller is a registered trademark of Zoeller Pump Company, LLC.